TFNO30VA2

Trasformatore 30VA 230/19 Vac

Edizione 1.4



1. Collegamento all'Alimentazione di Rete

Collegare i terminali 230V~ alla rete di alimentazione con una linea dedicata, utilizzando conduttori della dimensione corretta, protetti da un interruttore bipolare, in conformità alla normativa vigente, ubicato al di fuori degli impianti e facilmente accessibile.




PERICOLO – SHOCK ELETTRICO
Massima attenzione quando si connette l'alimentazione di rete.


2. Caratteristiche Tecniche

Dimensioni		mm 60(h) x 95(l) x 60(p)
Peso		1 Kg
Potenza		30 VA
Ingresso - Primario	A - B	230 V ±10%
Uscita – secondario	a - b	19 V ac
Massima corrente di Uscita		1,5 A ac
F1 – Termistore PTC		0.20 A @ 120°
Conformità		IEC 61558-2-6
Classe di Protezione		Classe II
Classe di Isolamento		Classe B

SCHEMA ELETTRICO

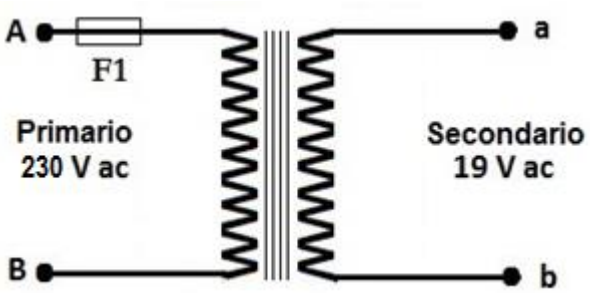

PIANO DI FORATURA (mm)

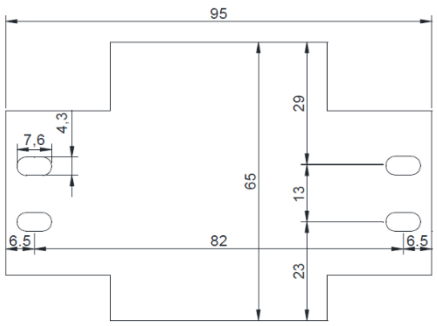

Nota: Il doppio isolamento è garantito se per il collegamento sono stati utilizzati i faston in dotazione dotati di coprifaston, correttamente crimpati ed inseriti nella loro sede.

Questo apparecchio è contrassegnato in conformità alla Direttiva Europea 2002/96/EC, Waste Electrical and Electronic Equipment (WEEE)
Assicurandosi che questo prodotto sia smaltito in modo corretto, l'utente contribuisce a prevenire le potenziali conseguenze negative per l'ambiente e la salute.



Il simbolo ▬ sul prodotto o sulla documentazione d'accompagnamento indica che questo prodotto non deve essere trattato come rifiuto domestico ma deve essere consegnato presso l'idoneo punto di raccolta per il riciclaggio d'apparecchiature elettriche ed elettroniche.
Disfarsene seguendo le normative locali per lo smaltimento rifiuti.
Lo smaltimento abusivo è punito con le sanzioni previste dalla legislazione nazionale vigente
Il prodotto può essere riconsegnato al distributore/installatore a fine vita in occasione di un nuovo acquisto.

CE

Copyright CIAS Elettronica S.r.l.

Printed in Italy

CIAS Elettronica S.r.l.

Direction, Administrative Office, Sales Office, Laboratory of Research and Development

20158 Milano, via Durando n. 38
Tel. +39 02 376716.1
Fax +39 02 39311225

Web-site: www.cias.it
E-mail: info@cias.it

Factory

23887 Olgiate Molgora (LC), Via Don Sturzo n. 17

TFNO30VA2

Transformer 30VA 230/19 Vac

Edition 1.4



1. Connection to Main Power Supply


Connect the 230V~ terminals to the power supply network with a dedicated line, using conductor of the correct size, protected by a bipolar current circuit breaker in accordance with local regulations, located outside of the equipment and easily accessible.

DANGER - ELECTRIC SHOCK
Use extreme caution when connecting to the power supply


2. Technical Characteristics

Dimensions	mm 60 (h) x 95 (l) x 60 (p)
Weight	1 Kg
Power	30 VA
Input Voltage - primary winding A - B	230V ±10%
Output Voltage - Secondary winding a - b	19 V ac
Maximum output current	1,5 A ac
F1 – PTC Thermistor	0.20 A @ 120°
Compliance	IEC 61558-2-6
Protection Class	Class II
Insulation Class	Class B

ELECTRICAL DIAGRAM

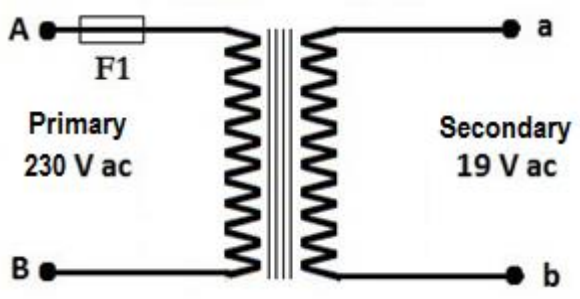

DRILLING PLAN (mm)

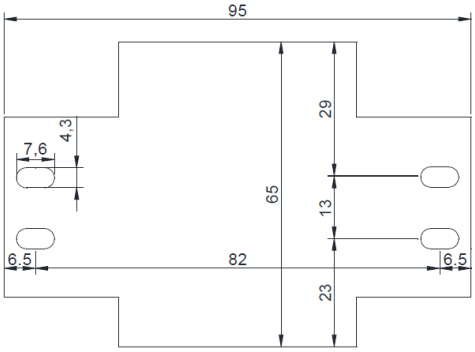

Note: Transformer is guaranteed as double insulated if you have been used to connect the power supply the faston supplied with their faston housing, properly crimped and correctly inserted in their socket.

This product is marked in compliance with the European Directive 2002/96/EC, Waste Electrical and Electronic Equipment (WEEE).
The correct disposal of the product will prevent potential negative consequences for the environment and the human health.



The symbol ▬ on the product or into the annexed documentation indicates that this product does not have to be dealt like domestic refusal but must be delivered near the suitable point of collection for the recycling of electrical and electronic equipment.

- The illicit disposal will be endorsed according to local regulations.
- At the end of operative life the product can be given back to the vendor/installation organization in occasion of a new purchase.

Copyright CIAS Elettronica S.r.l.

Printed in Italy

CIAS Elettronica S.r.l.

Direction, Administrative Office, Sales Office, Laboratory of Research and Development

20158 Milano, via Durando n. 38
Tel. +39 02 376716.1
Fax +39 02 39311225

Web-site: www.cias.it
E-mail: info@cias.it

Factory

23887 Olgiate Molgora (LC), Via Don Sturzo n. 17