

Integrated Mount Tester

DH-PFM2900

NEW RELEASE



Make The Camera Test Easier

Product Introduction

Hanging rope design



System indicator

Power indicator
Wi-Fi indicator

DC5V 2A Output

Battery/LED

Check the battery status
or on/off LED light

Reset



Charge

Type-C port for charging the
device.

Power

Turn on/off the device

Product Introduction



| Port | Description |
|-------------------------|--|
| LAN1& LAN2 & LAN3&LAN 4 | 100 Mbps Ethernet ports |
| PoE In | Reserved. |
| PoE OUT | Supports PoE output, maximum support 16 W. |
| 12V1A OUT | Supports 12 V output, maximum support 1 A. |

Device Connection







Offers effortless control of camera through DoLynk Care mobile app, such as:

- Change Device name/IP address;
- Check the live view;
- Adjust the image parameters;
- Set AI functions
-

Highlight Function

How to connect?

- Install the mobile app: DoLink Care
- Connect your phone with wireless tester's hotspot (2.4 GHz only);
- Power up and connect the camera
- Open the mobile app to easily test and adjust the image of the camera.

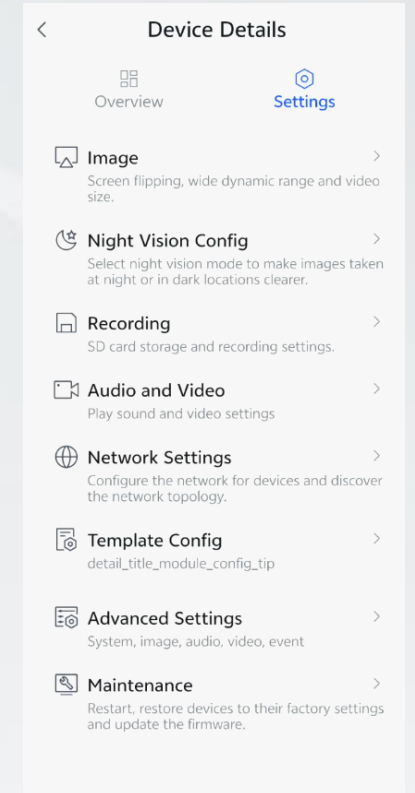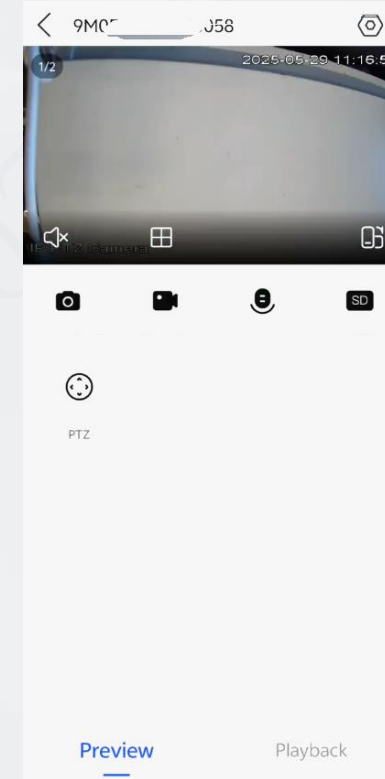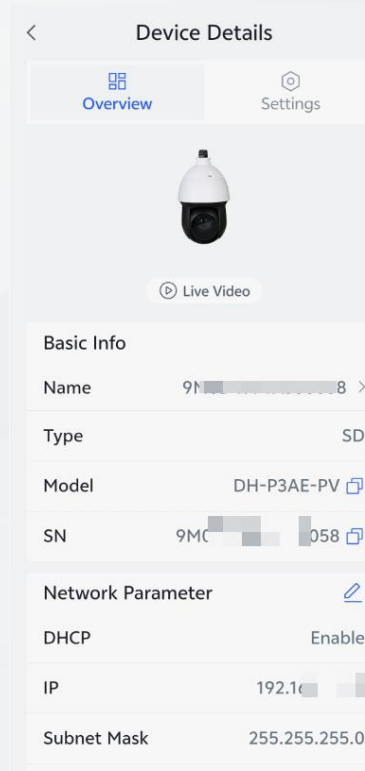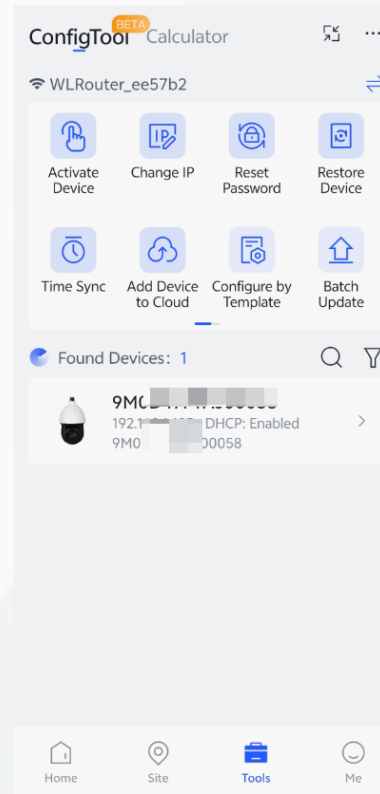

Camera

PoE or DC 12V power supply
for the camera



Tester

Use mobile app to connect with
tester's Wi-Fi hotspot



Care APP

Highlight Function



Use “Dolynk Care>Easy Config” to batch activate cameras at the same time

Power Supply Supports DC 12V, USD 5V and PoE outputs

- No need for external network/power supply or the camera
- Support both PoE and 12V outputs
- Can be work as power bank
- Power status can be easily detected on the tester

Battery Capacity: 7800 mAh

- Built-in 3.7 V polymer lithium battery with a capacity of 7800 mAh. It can work for up to 22 hours on a full charge, without any external power supply.



03 Summary

DH-PFM2900

Summary

The Integrated Mount Tester is a portable tool designed to simplify the installation and debugging of security devices. It enables you to view live videos from cameras and adjust image settings with ease. This versatile tool is particularly suitable for scenarios that require quick debugging, troubleshooting, and installation in locations without power.



CAMERA TEST

Features live video, image adjustment, function testing, and more.



POWER SUPPLY

Supports DC 12V, USB 5V, and PoE outputs



Wi-Fi HOTSPOT

Connects to the Wi-Fi hotspot of your tester through the mobile app.



DOLYNK CARE CONNECT

Offers effortless control of cameras through the DoLynk Care mobile app

THANKS