


DHI-ARM708-RS

Output Expansion Module

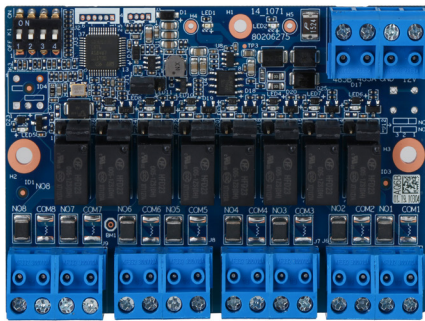

- 8-channel alarm outputs
- Address setting with DIP switch
- Alarm output switch between NO (Normally Open) and NC (Normally Closed) with jumper
- Remote update by client software

System Overview

DHI-ARM708-RS is an output expansion module which needs to be used together with ARC3008C.

Technical Specification

Port

Alarm Output	8
RS-485	1, connected to a maximum of 300 m (984.25 ft) cable typed RVV2*1.5

Function

Device Address	1-8
Alarm Output Mode	Switch between NO and NC with jumper
Output Capacity	DC30V/500mA
Update	Remote update by client software


General

Power Supply	12V DC
Power Consumption	1.8W
Operating Temperature	-10°C to +55°C (14°F to 131°F)
Operating Humidity	10%–90% (RH)
Product Dimensions	90.0 mm × 62.0 mm × 12.6 mm (3.54" × 2.44" × 0.5") (L × W × H)
Net Weight	≤1 kg (2.20 lb)

Ordering Information

Type	Model	Description
Accessories (Optional)	DHI-ARM708-RS	Output expansion module 8-channel alarm outputs Used with ARC3008C

Dimensions (mm/inch)

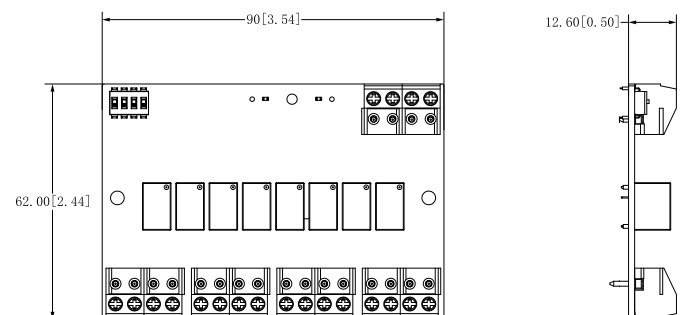

Application

